

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : A61M 51/78	A2	(11) International Publication Number: WO 99/03529
		(43) International Publication Date: 28 January 1999 (28.01.99)

(21) International Application Number: PCT/GB98/02103

(22) International Filing Date: 16 July 1998 (16.07.98)

(30) Priority Data:
9714948.8 16 July 1997 (16.07.97) GB

(71) Applicant (for all designated States except US): OWEN MUMFORD LIMITED [GB/GB]; Brook Hill, Woodstock, Oxford OX20 1TU (GB).

(72) Inventors; and


(75) Inventors/Applicants (for US only): CROSSMAN, David, Danvers [GB/GB]; The Tower, Christmas Common, Oxford OX9 5HL (GB). MARSHALL, Jeremy [GB/GB]; 16 Cranham Street, Jericho, Oxford OX2 6DD (GB).

(74) Agents: LAINE, Simon, James et al.; Wynne-Jones, Laine & James, 22 Rodney Road, Cheltenham, Gloucestershire GL50 1JJ (GB).

(81) Designated States: JP, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published*Without international search report and to be republished upon receipt of that report.*

(54) Title: IMPROVEMENTS RELATING TO INJECTION DEVICES

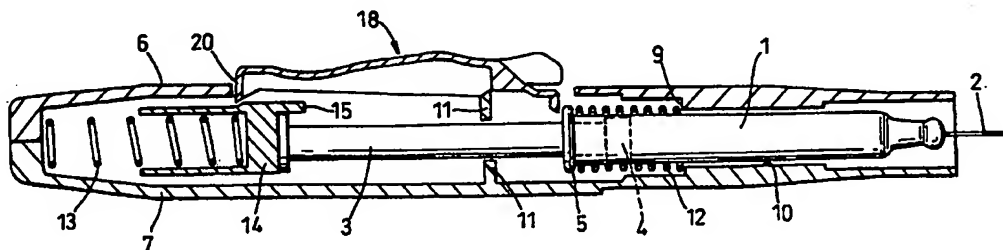

(57) Abstract

A one-shot throwaway injection device has a barrel (6, 7) that houses a syringe (1) initially in a retracted state held back by a trigger (18) against a drive spring (13). Actuation of the trigger causes the syringe to be thrust forwards by the spring acting on its plunger (3) until the needle (2) is fully projecting, and then the dose is ejected by the final expansion of the spring. Release of the trigger allows a return spring (12) to urge the syringe back and retract the needle. The barrel is a unitary plastics moulding of two longitudinally split halves (6, 7) hinged together with the trigger (18) integrally formed with one of these halves. The other components (the springs (12, 13) and the syringe (1)) are positioned in one half which is then closed up and fastened to the other half to complete the barrel.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

Improvements relating to Injection Devices

This invention relates to injection devices.

It concerns devices which are fitted with a syringe having a capsule with a needle projecting from the forward
5 end and a plunger from the rear end. A trigger and spring mechanism, when operated, shoots the syringe forwardly to project the needle, and then continues to act on the plunger to eject the dose. There is also a return spring arrangement to retract the needle after use, thereby making it
10 safe.

Hitherto, these firing devices have been quite complicated and expensive, and it is necessary to load and unload the syringe before and after use and to keep the device itself for repeated use. It is too expensive simply to
15 throw away. Also there have been problems with ensuring that the return spring works properly.

However, unloading particularly has its dangers with a sharp and possibly contaminated needle, and it is the aim of this invention to provide an injection device which is
20 simple and cheap enough to be thrown away with the syringe safely retracted inside it.

According to one aspect of the present invention there is provided an injector device for containing and operating a syringe having a capsule with a needle projecting from the
25 forward end and a plunger from the rear end, the device having a first spring initially in a compressed energised state at the rear end of the device held by a trigger, and

a second spring initially not fully energised and surrounding the capsule, wherein operation of the trigger releases the first spring which first urges the syringe forwardly by acting on the plunger and thence through the dose within the syringe, and secondly, when the syringe reaches a needle projecting position, presses the plunger forwards relative to the capsule to eject the dose, and wherein the second spring, fully compressed by this action, then exerts itself to retract the syringe and its needle, characterised in that the device has an integrally moulded two-part body formed in an open state, the trigger also being part of the integral moulding, and in that the body is closed and secured around a dose filled syringe in the retracted position and the first and second coil springs.

Conveniently, the body is in two substantially semi-cylindrical halves, joined by at least one thin web along adjacent longitudinal edges.

Preferably the trigger is a portion separated from a respective half of the body by all but webs that form a transverse hinge at an intermediate position along the trigger. The rear end of the trigger may have an inward projection that initially maintains the first spring primed, release being by pressing inwardly on the forward end. This forward end may have a pawl to catch behind the capsule when the capsule reaches the needle projecting position, thereby to prevent retraction under the influence of the second spring as long as the forward end remains pressed inwardly or the trigger is operated positively to withdraw the pawl.

The trigger may be duplicated, with one on each half, these triggers being squeezed together to operate the device.

Generally, there will also be a separately moulded
5 protective cap to fit over the forward end of the completed body. This cap is conveniently adapted to co-operate with the trigger to prevent that being operated while the cap is on. The cap can also have an internal formation that projects into the barrel to co-operate with a sheath
10 initially provided over the needle of the capsule, removal of the cap causing the sheath to be pulled off the needle.

The cap may be refitted after use, to be thrown away with the injection device.

According to another aspect of the invention there is
15 provided an injector device for containing and operating a syringe having a capsule with a needle projecting from the forward end and a plunger from the rear end, the device having a first spring initially in a compressed energised state at the rear end of the device held by a trigger, and
20 a second spring initially not fully energised and surrounding the capsule, wherein operation of the trigger releases the first spring which first urges the syringe forwardly by acting on the plunger and thence through the dose within the syringe, and secondly, when the syringe reaches a needle
25 projecting position, presses the plunger forwards relative to the capsule to eject the dose, and wherein the second spring, fully compressed by this action, then exerts itself to retract the syringe and its needle, characterised in that

the trigger is adapted to provide an obstruction to the syringe to prevent the retraction thereof as long as the trigger is maintained in its operated state, the retraction requiring release or an alternative operation of the trigger.

For a better understanding of the invention, one embodiment will now be described, by way of example, with reference to the accompanying drawings, in which:

Figures 1 - 4 are simplified axial sections of an injection device in various stages from initial assembly, through use to being ready for disposal,

Figure 5 is a plan view of the injection device,

Figure 6 is a perspective view of part of the device showing a trigger in more detail, and

Figure 7 is a perspective view of part of the device, with half of the barrel removed, showing a drive member and part of the inside of the trigger.

The injection device is designed to contain and operate a syringe having a capsule 1, a needle 2 at its forward end, and a plunger 3 at its rearward end which can actuate a piston 4 within the capsule to eject a dose through the needle 2. The rear end of the capsule has an outwardly projecting rim 5. This syringe is of known form.

The body of the injection device is formed by two generally semi-cylindrical halves 6 and 7 brought together and secured by adhesive or welding for example, or by snap-fitting lugs and sockets, to make a barrel with tapers at each end. The halves 6 and 7 are moulded in one piece in an

opened-out condition, being joined by a single long web, or several shorter webs 8. These extend along one pair of adjacent longitudinal edges of the halves 6 and 7 between the tapering ends, and serve as hinges when the halves are closed together.

Towards its forward end the body reduces internally at a shoulder 9 to a passage 10 which serves as a longitudinal guide for the capsule 1. At about the mid-length, there are internal ribs 11 non-obstructive to the piston 4 and the member described below which drives it but which form an abutment for the rim 5. A coil spring 12, initially only partially compressed, surrounds the capsule to act between the shoulder 9 and the out-turned rim 5. The forward end of the barrel is open for passage of the needle 2.

At the rear end the barrel is closed and provides a seat for another coil spring 13, initially compressed and nesting in the rearward facing cup of a slider 14 forming a drive member. The forward end of this slider bears against the rear end of the piston 4 and it has a finger 15 projecting forwardly to one side of that rear end and outside the cylindrical envelope of the spring 13. The slider 14 is prevented from rotating by wings 16 which run in internal grooves 17 along the barrel, these grooves being formed by rebates inside the edges of the halves 6 and 7 coming together when the device is closed up.

The half 6 of the barrel is formed with a trigger 18 of generally rectangular form extending lengthwise of the barrel. It is separated from the half 6 around most of its

periphery except for two short webs 19 at opposite sides in the region of the ribs 11. These webs form a transverse hinge, the plastics material of which the barrel is moulded allowing a certain flexible resilience. The rear end of the trigger 18 has an inwardly projecting abutment 20 against which the finger 15 initially bears. At the leading end of each trigger, as best seen in Figure 6, there is a finger pad 21 proud of the barrel, forward of which are two undercut parallel wings 22. Between these wings, and stepped down to the envelope of the barrel, there is a pawl 23 with a tooth 24 projecting inwardly at its forward end. The pawl can hinge about its rear end by virtue of the plastics construction. Another finger pad 25 is provided towards the rear of the trigger.

As supplied, this injection device has a cap 26 which fits closely over the forward portion of the barrel, as shown in outline in Figure 1. It has a rearward extension 27 to engage the undercuts below the wings 22 and over the back of the pawl 23. It is illustrated approaching this position in Figure 6. At the forward end, the cap may have an internal formation which extends inside the barrel and which engages behind the base of a needle sheath (not shown) in known manner.

In the Figure 1 position, the injector is inoperative, the trigger 18 being held against actuation by the extension 27 of the cap 26. The spring 12 is partially compressed and semi energised, and the spring 13 is fully compressed and therefore fully energised. When the device is to be used,

the cap is pulled off, this simultaneously freeing the trigger and removing the sheath.

The device is then applied against the skin of the patient and the finger pad 21 is pressed in as shown in
5 Figure 2. This hinges the trigger 18 so that the abutment 20 is moved outwardly, clear of the finger 15, thus freeing the compressed spring 13. This expands and, through the slider 14 and the plunger 3, thrusts the syringe forwards.

The trigger action depresses the pawl 23 towards the
10 syringe, where the tooth 24 might interfere with the spring 11. However, because of its flexibility, the pawl bends outwards and snaps over the rearward turns of the spring 12 and the rim 5. The spring 12 is slightly stiffer than the spring 13 over the intermediate and final parts of the
15 latter's expansion, in order to ensure the return of the syringe, but the momentum of the forward thrust ensures that the spring 12 is fully compressed.

When that is achieved, the capsule 1 is arrested and the pawl 23 snaps back into alignment with the trigger for
20 the tooth 24 to engage behind the rim 5 as shown in Figures 2 and 3. It may be long enough to remain engaged if the trigger 18 is released, or it may be short, requiring the finger pad 21 to be held down. In any event, the needle 2 is now fully projected, but the spring 13, no longer opposed
25 by the spring 12, continues to expand and the plunger 3 presses the piston 4 forwards, ejecting the dose.

The device is then withdrawn from the patient and the finger pad 21 released if the device is a short tooth

version. The trigger 18 springs back to its initial position, the pawl 23 releasing from the rim 5. With a long tooth version, the user presses on the rear finger pad 25 to tilt the trigger back and release the pawl. The spring 12
5 can now exert itself and push the syringe back, retracting the needle 2 to the position of Figure 4. The cap 26 may then be refitted, and the device thrown away.

There is a risk that, when pulling off the cap 26, the user will hold the barrel in a manner that will squeeze the
10 finger pad 21, thereby prematurely firing the device. To prevent this, the rim of the cap and the trigger may be so configured that pressure on the finger pad will prevent release of the cap. For example, the end of the extension
27 may be slightly out-turned and the undercuts of the wings
15 22 notched to receive the out-turned end. The user will, therefore, have to grip the barrel clear of the trigger, allowing the cap to snap free.

It will be understood that the barrel can have one or more windows, particularly in the forward part in order that
20 the state and position of the syringe can be visually checked.

CLAIMS

1. An injector device for containing and operating a syringe having a capsule (1) with a needle (2) projecting from the forward end and a plunger (3) from the rear end, the device having a first spring (13) initially in a compressed energised state at the rear end of the device held by a trigger (18), and a second spring (12) initially not fully energised and surrounding the capsule (1), wherein operation of the trigger (18) releases the first spring (13) which first urges the syringe forwardly by acting on the plunger (3) and thence through the dose within the syringe, and secondly, when the syringe reaches a needle projecting position, presses the plunger (13) forwards relative to the capsule (1) to eject the dose, and wherein the second spring (12), fully compressed by this action, then exerts itself to retract the syringe and its needle, characterised in that the device has an integrally moulded two-part body (6, 7) formed in an open state, the trigger (18) also being part of the integral moulding, and in that the body is closed and secured around a dose filled syringe in the retracted position and the first and second coil springs (13, 12).

2. An injection device as claimed in Claim 1, characterised in that the body is in two substantially semi-cylindrical halves (6, 7), joined by at least one thin web (8) along adjacent longitudinal edges.

3. An injection device as claimed in Claim 1 or 2, characterised in that the trigger (18) is a portion separated from a respective half of the body by all but webs (19)

that form a transverse hinge at an intermediate position along the trigger.

4. An injection device as claimed in Claim 3, characterised in that the rear end of the trigger (18) has
5 an inward projection (20) that initially maintains the first spring (13) primed, release being by pressing inwardly on the forward end (21).

5. An injection device as claimed in Claim 4, characterised in that the forward end of the trigger (18)
10 has a pawl (23) to catch behind the capsule (1) when the capsule reaches the needle projecting position, thereby to prevent retraction under the influence of the second spring (12) as long as the forward end remains pressed inwardly or the trigger is operated positively to withdraw the pawl.

15 6. An injection device as claimed in any preceding claim, characterised in that the trigger (18) is duplicated, with one on each half, these triggers being squeezed together to operate the device.

7. An injection device as claimed in any preceding
20 claim, and further comprising a separately moulded protective cap (26) to fit over the forward end of the completed body.

8. An injection device as claimed in Claim 7, characterised in that the cap (26) is adapted to co-operate
25 with the trigger (18) to prevent that being operated while the cap is on.

9. An injection device as claimed in Claim 7 or 8, characterised in that the cap has an internal formation that

projects into the barrel to co-operate with a sheath initially provided over the needle of the capsule, removal of the cap causing the sheath to be pulled off the needle.

10. An injector device for containing and operating a
5 syringe having a capsule (1) with a needle (2) projecting from the forward end and a plunger (3) from the rear end, the device having a first spring (13) initially in a compressed energised state at the rear end of the device held by a trigger (18), and a second spring (12) initially
10 not fully energised and surrounding the capsule (1), wherein operation of the trigger (18) releases the first spring (13) which first urges the syringe forwardly by acting on the plunger (3) and thence through the dose within the syringe, and secondly, when the syringe reaches a needle projecting
15 position, presses the plunger (13) forwards relative to the capsule (1) to eject the dose, and wherein the second spring (12), fully compressed by this action, then exerts itself to retract the syringe and its needle, characterised in that the trigger (18) is adapted to provide an obstruction (24)
20 to the syringe (1) to prevent the retraction thereof as long as the trigger is maintained in its operated state, the retraction requiring release or an alternative operation of the trigger.

11. An injection device as claimed in Claim 10 with
25 any one or more features from any one of Claims 1 to 9.

1/4

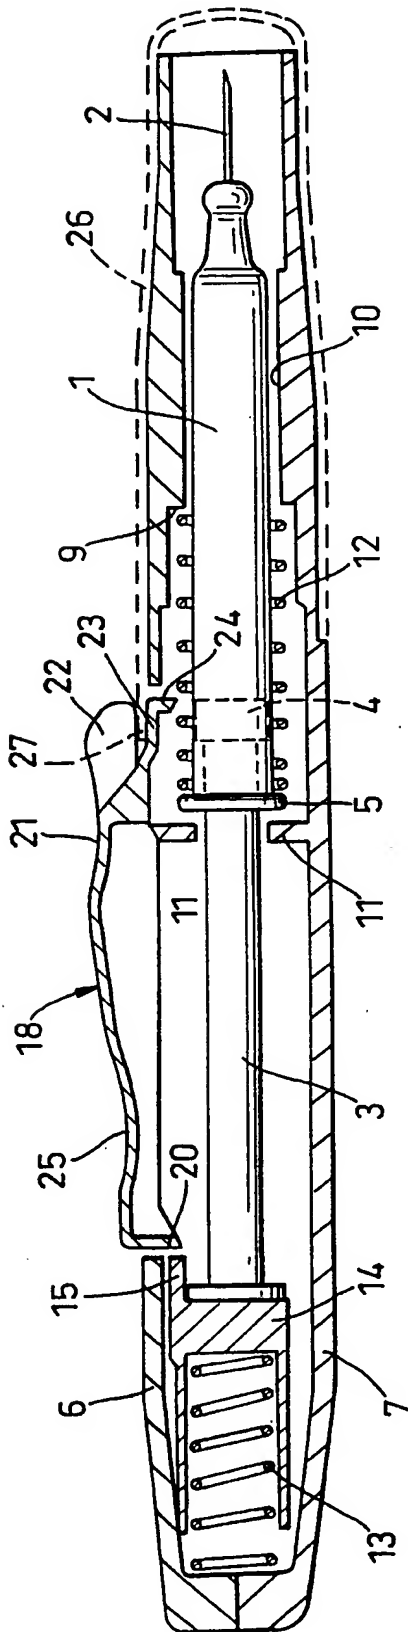


Fig. 1

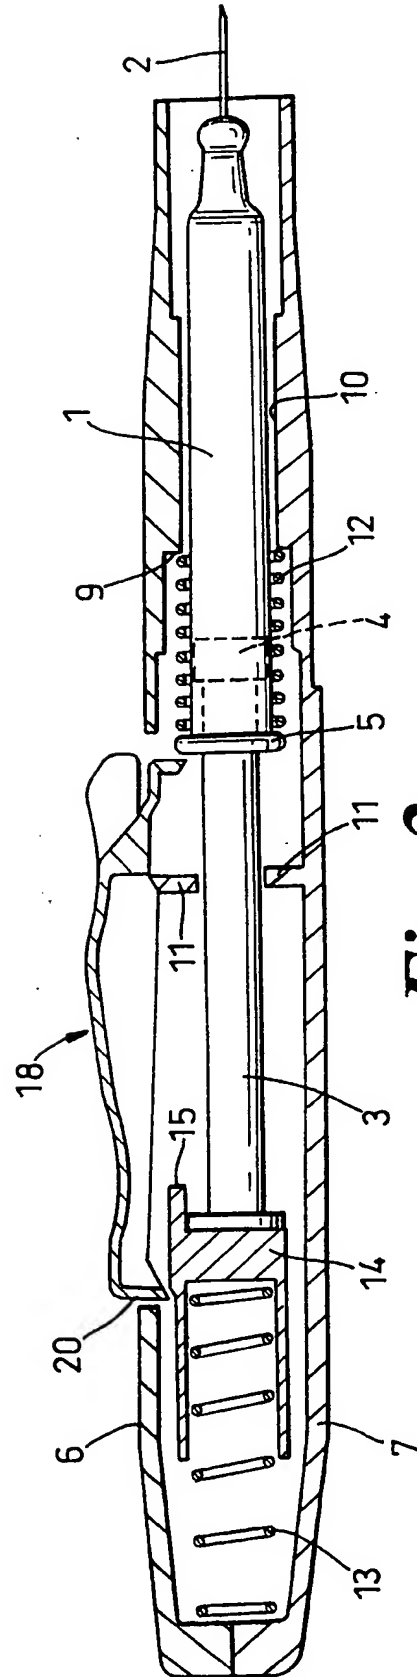


Fig. 2

2/4

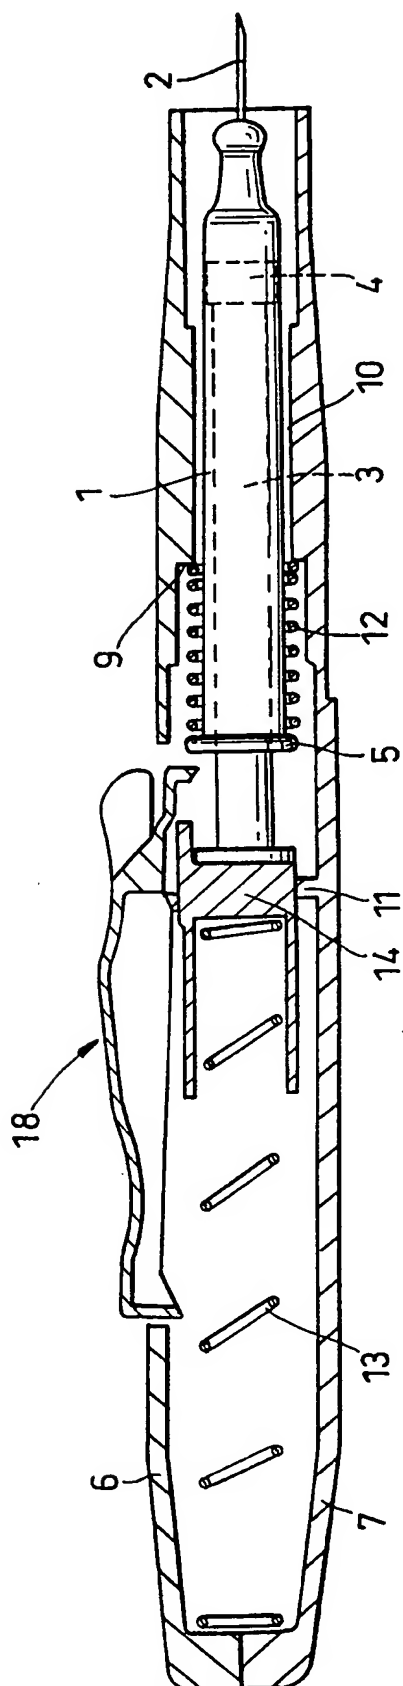


Fig. 3

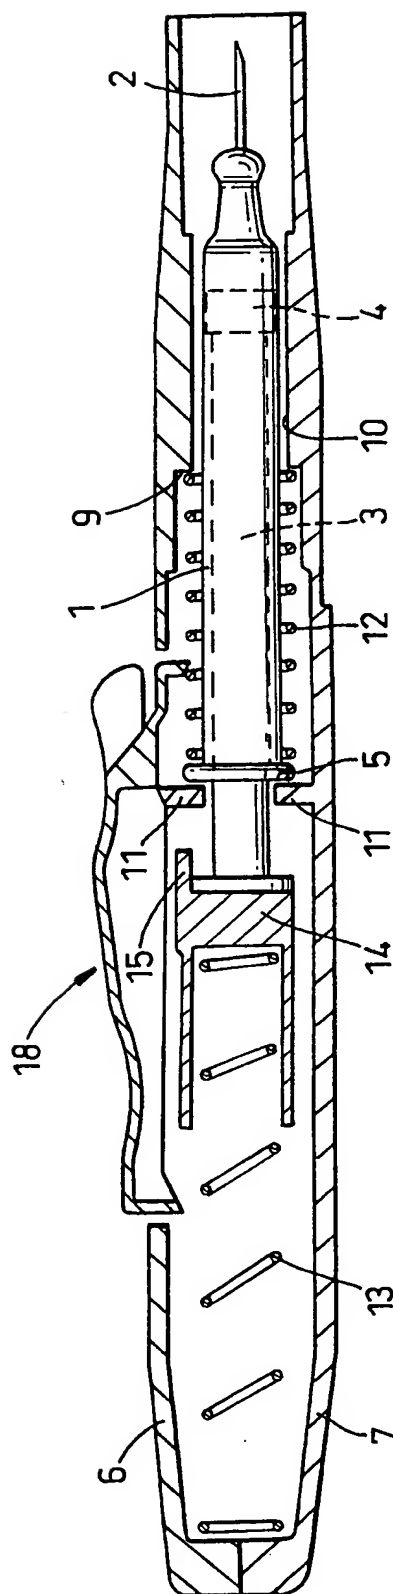


Fig. 4


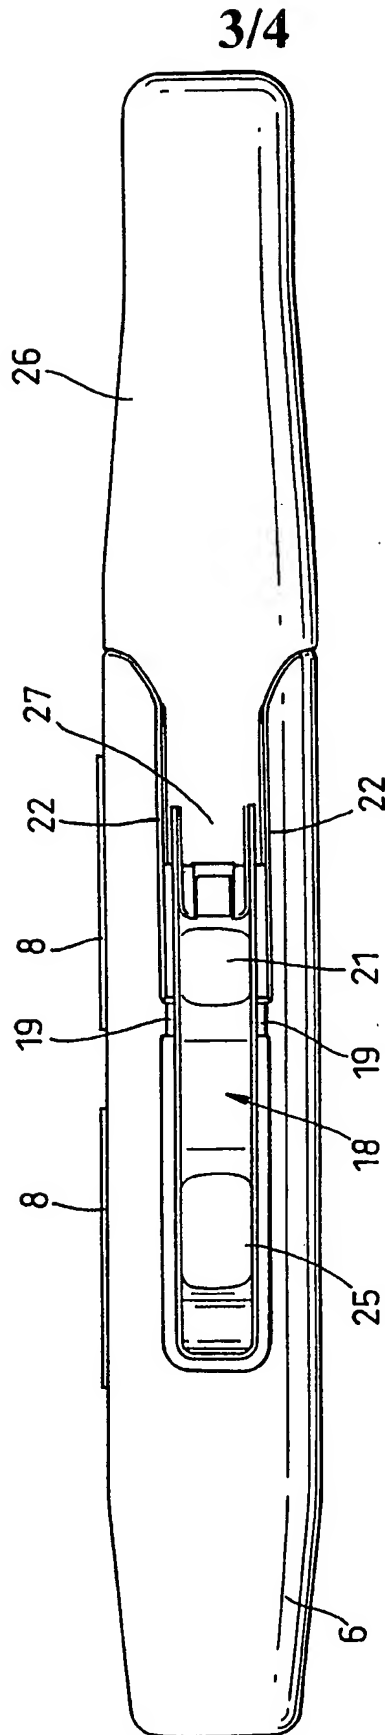


Fig. 5

4/4

Fig. 6



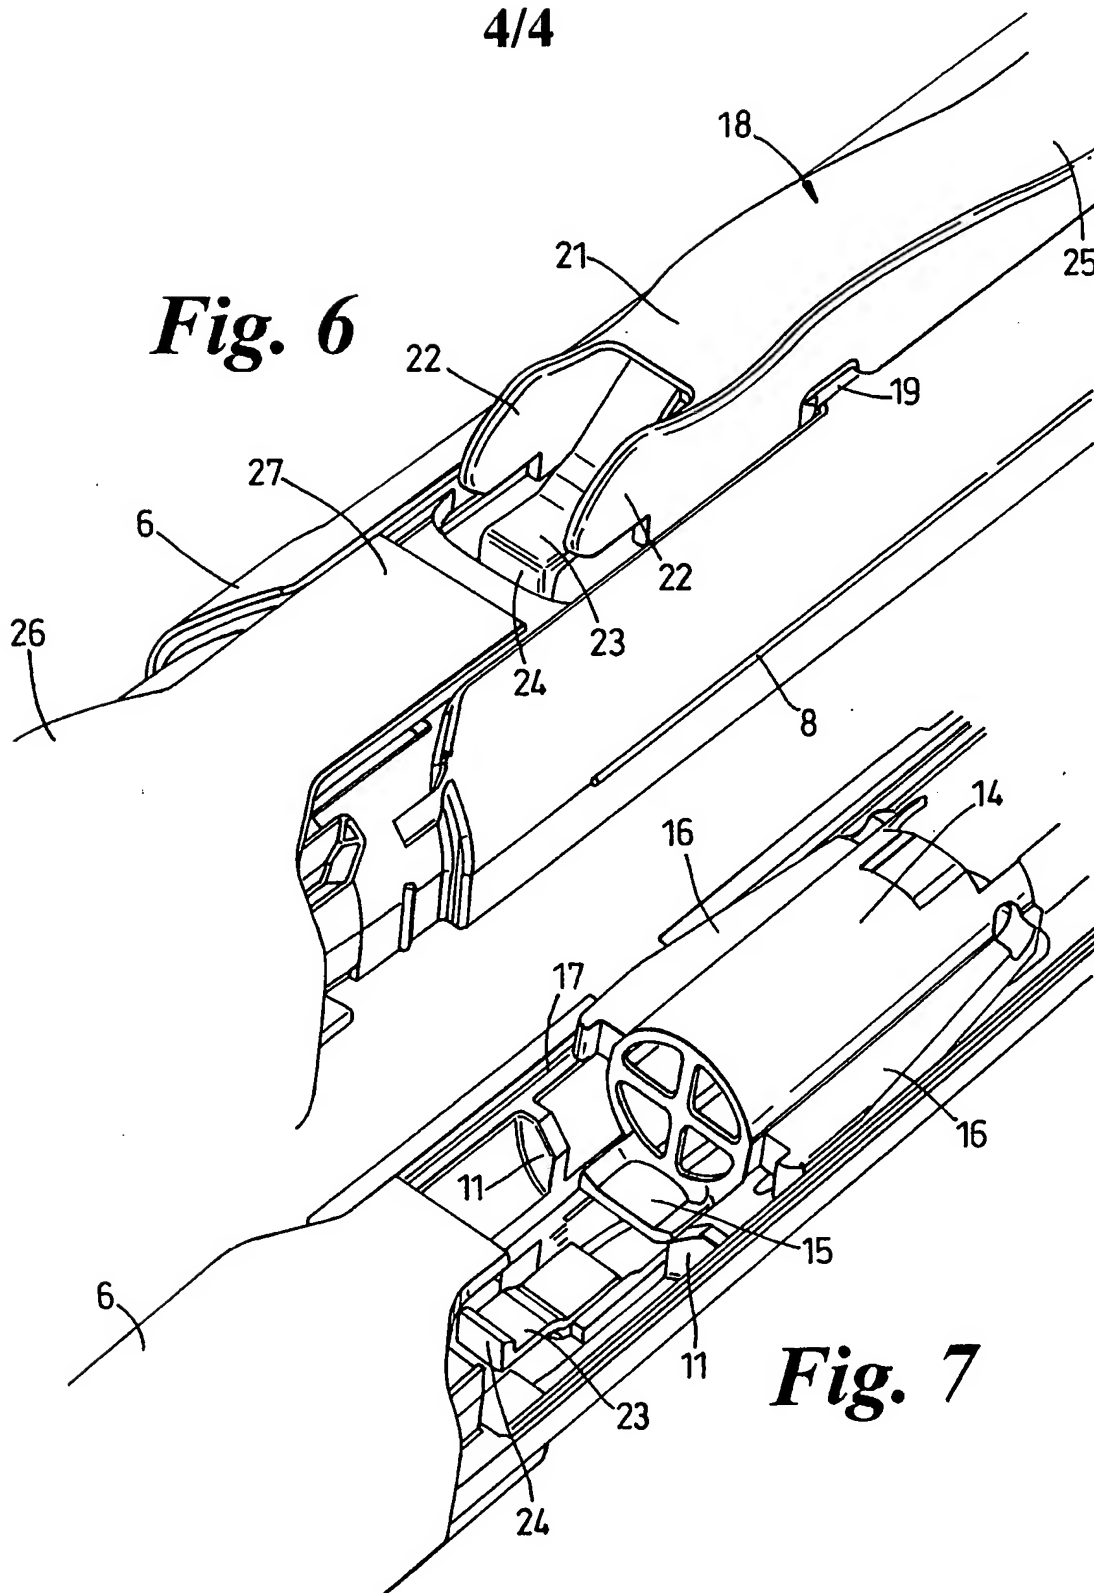

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : A61M 5/20	A3	(11) International Publication Number: WO 99/03529 (43) International Publication Date: 28 January 1999 (28.01.99)
(21) International Application Number: PCT/GB98/02103 (22) International Filing Date: 16 July 1998 (16.07.98) (30) Priority Data: 9714948.8 16 July 1997 (16.07.97) GB (71) Applicant (for all designated States except US): OWEN MUMFORD LIMITED [GB/GB]; Brook Hill, Woodstock, Oxford OX20 1TU (GB). (72) Inventors; and (75) Inventors/Applicants (for US only): CROSSMAN, David, Danvers [GB/GB]; The Tower, Christmas Common, Oxford OX9 5HL (GB). MARSHALL, Jeremy [GB/GB]; 16 Cranham Street, Jericho, Oxford OX2 6DD (GB). (74) Agents: LAINE, Simon, James et al.; Wynne-Jones, Laine & James, 22 Rodney Road, Cheltenham, Gloucestershire GL50 1JJ (GB).		(81) Designated States: JP, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i> (88) Date of publication of the international search report: 8 April 1999 (08.04.99)
(54) Title: IMPROVEMENTS RELATING TO INJECTION DEVICES <div data-bbox="305 1129 1312 1381" data-label="Image"> </div> (57) Abstract <p>A one-shot throwaway injection device has a barrel (6, 7) that houses a syringe (1) initially in a retracted state held back by a trigger (18) against a drive spring (13). Actuation of the trigger causes the syringe to be thrust forwards by the spring acting on its plunger (3) until the needle (2) is fully projecting, and then the dose is ejected by the final expansion of the spring. Release of the trigger allows a return spring (12) to urge the syringe back and retract the needle. The barrel is a unitary plastics moulding of two longitudinally split halves (6, 7) hinged together with the trigger (18) integrally formed with one of these halves. The other components (the springs (12, 13) and the syringe (1)) are positioned in one half which is then closed up and fastened to the other half to complete the barrel.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

INTERNATIONAL SEARCH REPORT

Inter Application No

PCT/GB 98/02103

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 A61M5/20

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 A61M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3 880 163 A (RITTERSKAMP) 29 April 1975 see column 6, line 38 - column 7, line 14; figures	10,11
A	EP 0 516 473 A (OWEN MUMFORD) 2 December 1992 see abstract; figure 1	1-9
A	US 4 258 713 A (WARDLAW STEPHEN C) 31 March 1981 see column 4, line 43 - column 5, line 49; figure 6	1-9
A	WO 94 11041 A (R G S.A.S) 26 May 1994 see page 11, line 28 - page 12, line 36; figures 1-4	1-11
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

13 January 1999

Date of mailing of the international search report

21.01.99

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Clarkson, P

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 98/02103

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 599 309 A (MARSHALL JEREMY ET AL) 4 February 1997 ----	1-9
A	US 5 267 963 A (BACHYNSKY NICHOLAS) 7 December 1993 see column 5, line 23 - line 38; figures 3-5 ----	1-9
A	EP 0 014 006 A (DUPHAR INT.) 6 August 1980 see page 19, line 15 - page 20, line 3; figures 3,4 ----	1-9
A	FR 2 342 079 A (CONSTANTINIDIS) 23 September 1977 see the whole document ----	10,11
A	DE 20 17 598 A (BEN-MOURA) 29 October 1970 see the whole document -----	10,11

INTERNATIONAL SEARCH REPORT

International application No.
PCT/GB 98/02103

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☒ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.

2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.

3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:

4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

☐ The additional search fees were accompanied by the applicant's protest.

☒ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1-9

Automatic injector with integrally moulded two-part body.

2. Claims: 10, 11

automatic injector with trigger which prevents retraction of syringe.

INTERNATIONAL SEARCH REPORT

Information on patent family members

Inter national Application No

PCT/GB 98/02103

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 3880163	A	29-04-1975	NONE	
EP 516473	A	02-12-1992	DE 69208287 D	28-03-1996
			DE 69208287 T	18-07-1996
			JP 5161712 A	29-06-1993
			US 5300030 A	05-04-1994
US 4258713	A	31-03-1981	NONE	
WO 9411041	A	26-05-1994	IT 1257458 B	25-01-1996
			IT 1262288 B	19-06-1996
			DE 69319753 D	20-08-1998
			EP 0768902 A	23-04-1997
			JP 8505543 T	18-06-1996
			US 5681291 A	28-10-1997
US 5599309	A	04-02-1997	EP 0693946 A	31-01-1996
			WO 9421316 A	29-09-1994
US 5267963	A	07-12-1993	AU 671861 B	12-09-1996
			AU 5084393 A	15-03-1994
			CA 2142901 A	03-03-1994
			CN 1083395 A	09-03-1994
			EP 0655899 A	07-06-1995
			JP 8502180 T	12-03-1996
			MX 9300089 A	28-02-1994
			WO 9404103 A	03-03-1994
			ZA 9306084 A	14-03-1994
EP 14006	A	06-08-1980	US 4226235 A	07-10-1980
			AR 218414 A	30-05-1980
			AT 4670 T	15-10-1983
			AU 531657 B	01-09-1983
			AU 5481580 A	31-07-1980
			BR 8000387 A	30-09-1980
			DK 25780 A	26-07-1980
			IN 154245 A	06-10-1984
			JP 55122562 A	20-09-1980
			ZA 8000367 A	28-01-1981
FR 2342079	A	23-09-1977	NONE	
DE 2017598	A	29-10-1970	FR 2040830 A	22-01-1971
			BE 748605 A	16-09-1970
			GB 1311937 A	28-03-1973
			NL 7005292 A	19-10-1970
			US 3656472 A	18-04-1972
			ZA 7002344 A	28-04-1971